


460 S&W MAG.

XRG-D 260 GRS SB460C



This solid copper hollow-point bullet construction results in near 100% weight retention regardless of the barriers encountered. Light-for-caliber bullet weights produce low perceived recoil, high velocity, and reliable expansion from today's compact personal defense handguns. The impressive, real-world performance of XRG Defense has been proven by many European Law Enforcement units.

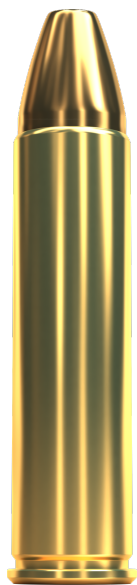

PROPERTIES

| | | | |
|------------------------|--------------------|--------------------|---------------|
| BULLET | TYPE | | XRG-D |
| | WEIGHT | grs | 260 |
| | DIAMETER | in | 0.452 |
| | SECTIONAL DENSITY | lb/in ² | 0.182 |
| | MATERIAL OF JACKET | | - |
| BALLISTIC COEFFICIENT | | G1 | 0.230 |
| PRIMER | TYPE | | N/A |
| | STYLE | | N/A |
| CARTRIDGE | LENGTH | in | 2.288 |
| CASINGS | | | Factory Brass |
| POWER FACTOR ESTIMATED | | kgr-fps | 500.0 |
| +P AMMUNITION | | | No |
| TEST BARREL LENGTH | | in | 8¼ |
| SUGGESTED USE | | | N/A |
| FEATURES | | | N/A |
| PACKAGING | | | |
| BOXES PER CASE | | | 12 |
| WEIGHT PER CASE | | lb | 17.6 |

BALLISTICS

| | | | | | |
|------------------|-------|--------|-------|-------|-------|
| DISTANCE | y | MUZZLE | 25 | 50 | 100 |
| VELOCITY | fps | 1,923 | 1,841 | 1,762 | 1,612 |
| ENERGY | ft-lb | 2,134 | 1,957 | 1,792 | 1,499 |
| DISTANCE | y | 12.5 | 25 | 50 | 100 |
| POINTS OF IMPACT | in | -0.2 | 0.0 | -0.2 | -2.7 |

