


300 AAC BLACKOUT TXRG 110 GRS SB300BLKXA



New generation lead free bullets Modern, highly efficient design incorporating a boat-tail base with a new, pointed tip for a flat trajectory and maximum retained energy. Blue plastic tip enhances expansion at all ranges while the solid copper construction maximizes weight retention.

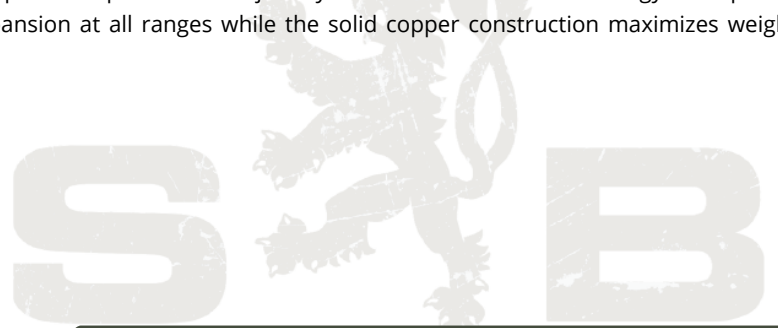

BALLISTICS

| DISTANCE | y | MUZZLE | 100 | 200 | 300 | 400 |
|------------------|-------|--------|-------|-------|-------|-------|
| VELOCITY | fps | 2,215 | 1,939 | 1,682 | 1,441 | 1,218 |
| ENERGY | ft-lb | 1,198 | 918 | 691 | 507 | 362 |
| DISTANCE | y | 50 | 100 | 200 | 300 | 400 |
| POINTS OF IMPACT | in | 0.0 | 0.0 | -7.3 | -27.0 | -63.7 |

PROPERTIES

| | | | |
|------------------------|--------------------|--------------------|-------|
| BULLET | TYPE | | TXRG |
| | WEIGHT | grs | 110 |
| | DIAMETER | in | 0.308 |
| | SECTIONAL DENSITY | lb/in ² | 0.166 |
| | MATERIAL OF JACKET | | - |
| BALLISTIC COEFFICIENT | | G1 | 0.288 |
| | | G7 | 0.145 |
| CARTRIDGE | LENGTH | in | 2.224 |
| POWER FACTOR ESTIMATED | | kgr-fps | 243.7 |
| TEST BARREL LENGTH | | in | 16¼ |
| SUGGESTED USE | | | N/A |
| FEATURES | | | N/A |

PACKAGING

| | | | |
|-----------------|----|--|------|
| BOXES PER CASE | | | 50 |
| WEIGHT PER CASE | lb | | 34.2 |

