


# 7 × 57 TXRG 150 GRS SB757XA



New generation lead free bullets Modern, highly efficient design incorporating a boat-tail base with a new, pointed tip for a flat trajectory and maximum retained energy. Blue plastic tip enhances expansion at all ranges while the solid copper construction maximizes weight retention.

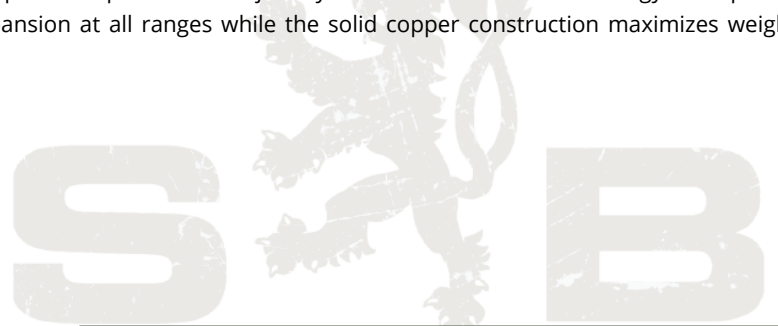

## PROPERTIES

|                               |                    |                    |       |
|-------------------------------|--------------------|--------------------|-------|
| <b>BULLET</b>                 | TYPE               |                    | TXRG  |
|                               | WEIGHT             | grs                | 150   |
|                               | DIAMETER           | in                 | N/A   |
|                               | SECTIONAL DENSITY  | lb/in <sup>2</sup> | N/A   |
|                               | MATERIAL OF JACKET |                    | -     |
| <b>BALLISTIC COEFFICIENT</b>  |                    | G1                 | 0.449 |
|                               |                    | G7                 | 0.226 |
| <b>CARTRIDGE</b>              | LENGTH             | in                 | 3.071 |
| <b>POWER FACTOR ESTIMATED</b> |                    | kgr-fps            | 380.9 |
| <b>TEST BARREL LENGTH</b>     |                    | in                 | 23½   |
| <b>SUGGESTED USE</b>          |                    |                    | N/A   |
| <b>FEATURES</b>               |                    |                    | N/A   |

## PACKAGING

|                        |  |    |      |
|------------------------|--|----|------|
| <b>BOXES PER CASE</b>  |  |    | 12   |
| <b>WEIGHT PER CASE</b> |  | lb | 16.5 |

## BALLISTICS

|                         |       |        |       |       |       |       |
|-------------------------|-------|--------|-------|-------|-------|-------|
| <b>DISTANCE</b>         | y     | MUZZLE | 100   | 200   | 300   | 400   |
| <b>VELOCITY</b>         | fps   | 2,539  | 2,345 | 2,160 | 1,984 | 1,815 |
| <b>ENERGY</b>           | ft-lb | 2,147  | 1,832 | 1,554 | 1,310 | 1,097 |
| <b>DISTANCE</b>         | y     | 50     | 100   | 200   | 300   | 400   |
| <b>POINTS OF IMPACT</b> | in    | -0.3   | 0.0   | -4.3  | -16.1 | -36.8 |

