


308 WIN. TXRG 110 GRS SB308XB



New generation lead free bullets Modern, highly efficient design incorporating a boat-tail base with a new, pointed tip for a flat trajectory and maximum retained energy. Blue plastic tip enhances expansion at all ranges while the solid copper construction maximizes weight retention.

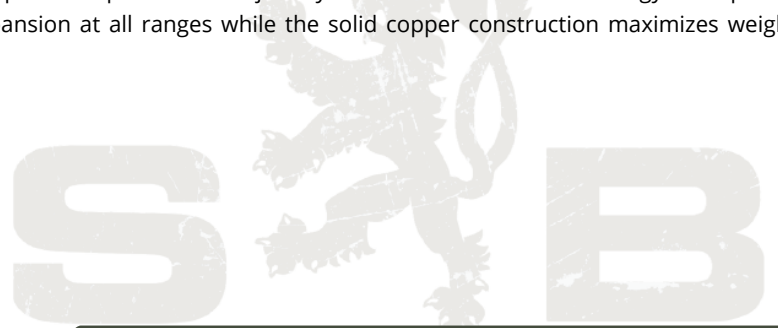

PROPERTIES

| | | | |
|-------------------------------|--------------------|--------------------|-------|
| BULLET | TYPE | | TXRG |
| | WEIGHT | grs | 110 |
| | DIAMETER | in | 0.308 |
| | SECTIONAL DENSITY | lb/in ² | 0.166 |
| | MATERIAL OF JACKET | | - |
| BALLISTIC COEFFICIENT | | G1 | 0.288 |
| | | G7 | 0.145 |
| CARTRIDGE | LENGTH | in | 2.799 |
| POWER FACTOR ESTIMATED | | kgr-fps | 279.7 |
| TEST BARREL LENGTH | | in | 23½ |
| SUGGESTED USE | | | N/A |
| FEATURES | | | N/A |

PACKAGING

| | | | |
|------------------------|--|----|------|
| BOXES PER CASE | | | 12 |
| WEIGHT PER CASE | | lb | 14.3 |

BALLISTICS

| DISTANCE | y | MUZZLE | 100 | 200 | 300 | 400 |
|------------------|-------|--------|-------|-------|-------|-------|
| VELOCITY | fps | 2,766 | 2,452 | 2,160 | 1,888 | 1,634 |
| ENERGY | ft-lb | 1,868 | 1,468 | 1,139 | 871 | 652 |
| DISTANCE | y | 50 | 100 | 200 | 300 | 400 |
| POINTS OF IMPACT | in | -0.4 | 0.0 | -3.8 | -15.1 | -36.3 |