


# 40 S&W NONTOX TFMJ V311232 180 GRS



After firing the cartridge is free from toxic exposure to barium, lead, mercury, antimony. It does not pollute the environment, does not endanger the shooter's health with combustion products, and does not leave harmful residue in the gun. It ensures safe shooting in closed premises and on target ranges. Unique patented primer design.

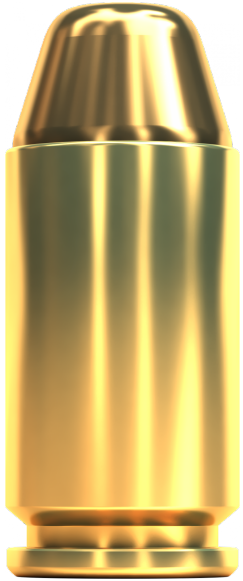

## PROPERTIES

<b>BULLET</b>	TYPE	TFMJ	
	WEIGHT	grs	180
		g	11.70
	SECTIONAL DENSITY	lb/in <sup>2</sup>	0.161
	MATERIAL OF JACKET	CuZn 10	
NUMBER	2317		
<b>BALLISTIC COEFFICIENT</b>	G1	0.191	
<b>CARTRIDGE</b>	WEIGHT	g	16.7
	LENGTH	mm	28.80
<b>CASINGS</b>	Factory Brass		
<b>POWER FACTOR ESTIMATED</b>	kg-fps	174.2	
<b>+P AMMUNITION</b>	No		
<b>TEST BARREL LENGTH</b>	mm	102	
<b>SUGGESTED USE</b>	Range, Match/Competition		
<b>FEATURES</b>	Fully Encapsulated Bullet, Reliable Functioning, Non-expanding, No Barrel Leading		
<b>PACKAGING</b>			
<b>BOXES PER CASE</b>	20		
<b>WEIGHT PER CASE</b>	kg	18.3	
	lb	40	

## BALLISTICS

DISTANCE	m	MUZZLE	25	50	100
VELOCITY	m/s	295	287	280	268
ENERGY	J	509	483	459	419
DISTANCE	m	12.5	25	50	100
POINTS OF IMPACT	cm	0.2	0.0	-5.9	-41.6

