


7 × 57
SP V340662
 140 GRS



Semi-jacketed Soft Point bullet. A lead core with a precisely engineered jacket results from its controlled expansion and high weight retention.

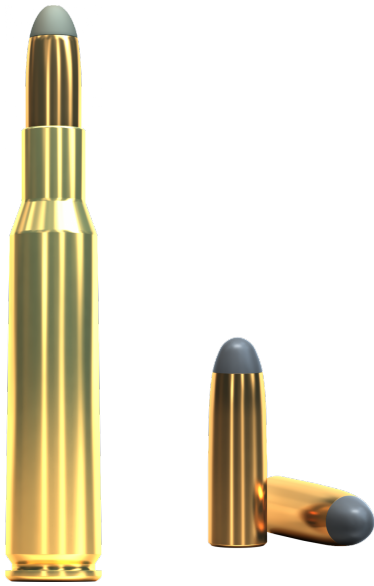

PROPERTIES

| | | |
|-------------------------------|--------------------|--|
| BULLET | TYPE | SP |
| | WEIGHT | grs 140 |
| | | g 9.10 |
| | SECTIONAL DENSITY | lb/in ² 0.248 |
| | MATERIAL OF JACKET | CuZn 10 |
| | NUMBER | 2931 |
| BALLISTIC COEFFICIENT | | G1 0.231 |
| | | G7 0.115 |
| MRD | m | 156 |
| CARTRIDGE | WEIGHT | g 23.4 |
| | LENGTH | mm 73.00 |
| CASINGS | | Factory Brass |
| POWER FACTOR ESTIMATED | kg·fps | 371.1 |
| +P AMMUNITION | | No |
| TEST BARREL LENGTH | mm | 600 |
| SUGGESTED USE | | Hunting |
| FEATURES | | Reliable Functioning, Rapid- Controlled Expansion, Accurate |
| PACKAGING | | |
| BOXES PER CASE | | 20 |
| WEIGHT PER CASE | kg | 10.7 |
| | lb | 23 |

BALLISTICS

| | | | | | | |
|-----------------------------|-----|--------|-------|-------|-------|--------|
| DISTANCE | m | MUZZLE | 100 | 200 | 300 | 400 |
| VELOCITY | m/s | 808 | 681 | 566 | 462 | 367 |
| ENERGY | J | 2,971 | 2,110 | 1,459 | 969 | 612 |
| DISTANCE | m | 50 | 100 | 200 | 300 | 400 |
| POINTS OF IMPACT | cm | -0.3 | 0.0 | -16.4 | -63.9 | -158.4 |
| POINTS OF IMPACT MRD | cm | 1.7 | 3.9 | -8.7 | -52.3 | -142.9 |

