


# 6,5 × 55 SE

## SP

V330572  
140 GRS

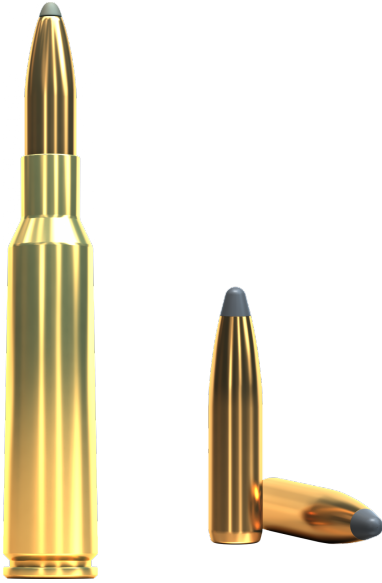

Semi-jacketed Soft Point bullet. A lead core with a precisely engineered jacket results from its controlled expansion and high weight retention.



### PROPERTIES

|                               |                    |  |
|-------------------------------|--------------------|--|
| <b>BULLET</b>                 | TYPE               | SP   |
|                               | WEIGHT             | grs 140  |
|                               |                    | g 9.10   |
|                               | SECTIONAL DENSITY  | lb/in <sup>2</sup> 0.287   |
|                               | MATERIAL OF JACKET | CuZn 10  |
|                               | NUMBER             | 2928   |
| <b>BALLISTIC COEFFICIENT</b>  |                    | G1 0.417   |
|                               |                    | G7 0.210   |
| <b>MRD</b>                    |                    | m 163  |
| <b>CARTRIDGE</b>              | WEIGHT             | g 23.5   |
|                               | LENGTH             | mm 75.30   |
| <b>CASINGS</b>                |                    | Factory Brass  |
| <b>POWER FACTOR ESTIMATED</b> | kg·r·fps           | 364.3  |
| <b>+P AMMUNITION</b>          |                    | No   |
| <b>TEST BARREL LENGTH</b>     | mm                 | 600  |
| <b>SUGGESTED USE</b>          |                    | Hunting  |
| <b>FEATURES</b>               |                    | Reliable<br>Functioning, Rapid-<br>Controlled<br>Expansion, Accurate |
| <b>PACKAGING</b>              |                    |  |
| <b>BOXES PER CASE</b>         |                    | 20   |
| <b>WEIGHT PER CASE</b>        | kg                 | 10.8   |
|                               | lb                 | 24.5   |

### BALLISTICS

|                             |     |        |       |       |       |        |
|-----------------------------|-----|--------|-------|-------|-------|--------|
| <b>DISTANCE</b>             | m   | MUZZLE | 100   | 200   | 300   | 400    |
| <b>VELOCITY</b>             | m/s | 793    | 723   | 656   | 593   | 534    |
| <b>ENERGY</b>               | J   | 2,861  | 2,376 | 1,959 | 1,601 | 1,295  |
| <b>DISTANCE</b>             | m   | 50     | 100   | 200   | 300   | 400    |
| <b>POINTS OF IMPACT</b>     | cm  | -0.4   | 0.0   | -13.8 | -50.6 | -115.3 |
| <b>POINTS OF IMPACT MRD</b> | cm  | 1.5    | 3.8   | -6.2  | -39.1 | -100.0 |

