


222 REM.

SP V344932

50 GRS

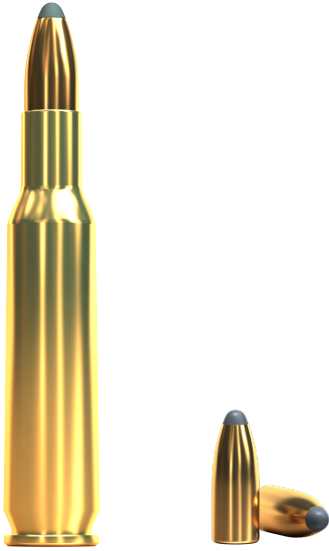

Semi-jacketed Soft Point bullet. A lead core with a precisely engineered jacket results from its controlled expansion and high weight retention.



PROPERTIES

| | | |
|-------------------------------|--------------------|--|
| BULLET | TYPE | SP |
| | WEIGHT | grs 50 |
| | | g 3.24 |
| | SECTIONAL DENSITY | lb/in ² 0.142 |
| | MATERIAL OF JACKET | CuZn 10 |
| | NUMBER | 2913 |
| BALLISTIC COEFFICIENT | G1 | 0.177 |
| | G7 | 0.088 |
| MRD | m | 178 |
| CARTRIDGE | WEIGHT | g 11.1 |
| | LENGTH | mm 52.60 |
| CASINGS | | Factory Brass |
| POWER FACTOR ESTIMATED | kg·fps | 159.1 |
| +P AMMUNITION | | No |
| TEST BARREL LENGTH | mm | 600 |
| SUGGESTED USE | | Hunting |
| FEATURES | | Reliable Functioning, Rapid- Controlled Expansion, Accurate |
| PACKAGING | | |
| BOXES PER CASE | | 60 |
| WEIGHT PER CASE | kg | 15 |
| | lb | 32 |

BALLISTICS

| | | | | | | |
|-----------------------------|-----|--------|-------|-------|-------|--------|
| DISTANCE | m | MUZZLE | 100 | 200 | 300 | 400 |
| VELOCITY | m/s | 970 | 789 | 628 | 486 | 361 |
| ENERGY | J | 1,524 | 1,009 | 639 | 383 | 212 |
| DISTANCE | m | 50 | 100 | 200 | 300 | 400 |
| POINTS OF IMPACT | cm | -0.9 | 0.0 | -11.1 | -47.6 | -127.0 |
| POINTS OF IMPACT MRD | cm | 1.0 | 3.8 | -3.4 | -36.1 | -111.7 |

