


9,3 × 62

FMJ

V341362
232 GRS

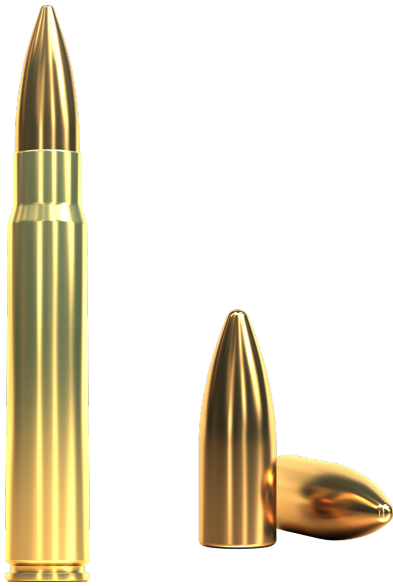

Full Metal Jacket bullet with a lead core and metallic jacket. Loaded in a wide range of calibers for use in specific hunting applications in addition to numerous competitive and target shooting disciplines.



PROPERTIES

| | | |
|-------------------------------|-------------------|------------------------|
| BULLET | TYPE | FMJ |
| WEIGHT | grs | 232 |
| | g | 15.00 |
| | SECTIONAL DENSITY | lb/in ² N/A |
| MATERIAL OF JACKET | CuZn 10 | |
| NUMBER | 2946 | |
| BALLISTIC COEFFICIENT | G1 | 0.378 |
| | G7 | 0.190 |
| MRD | m | 156 |
| CARTRIDGE | WEIGHT | g 31.3 |
| | LENGTH | mm 83.40 |
| CASINGS | N/A | |
| POWER FACTOR ESTIMATED | kgf-fps | N/A |
| +P AMMUNITION | No | |
| TEST BARREL LENGTH | mm | 600 |
| SUGGESTED USE | N/A | |
| FEATURES | N/A | |
| PACKAGING | | |
| BOXES PER CASE | 8 | |
| WEIGHT PER CASE | kg | 12.9 |
| | lb | 29 |

BALLISTICS

| | | | | | | |
|-----------------------------|-----|--------|-------|-------|-------|--------|
| DISTANCE | m | MUZZLE | 100 | 200 | 300 | 400 |
| VELOCITY | m/s | 764 | 688 | 617 | 550 | 486 |
| ENERGY | J | 4,378 | 3,552 | 2,854 | 2,267 | 1,773 |
| DISTANCE | m | 50 | 100 | 200 | 300 | 400 |
| POINTS OF IMPACT | cm | -0.2 | 0.0 | -15.8 | -57.5 | -131.9 |
| POINTS OF IMPACT MRD | cm | 1.7 | 3.8 | -8.2 | -46.1 | -116.6 |

