




40 S&W

XRG-D

V312462
130 GRS

This solid copper hollow-point bullet construction results in near 100% weight retention regardless of the barriers encountered. Light-for-caliber bullet weights produce low perceived recoil, high velocity, and reliable expansion from today's compact personal defense handguns. The impressive, real-world performance of XRG Defense has been proven by many European Law Enforcement units.

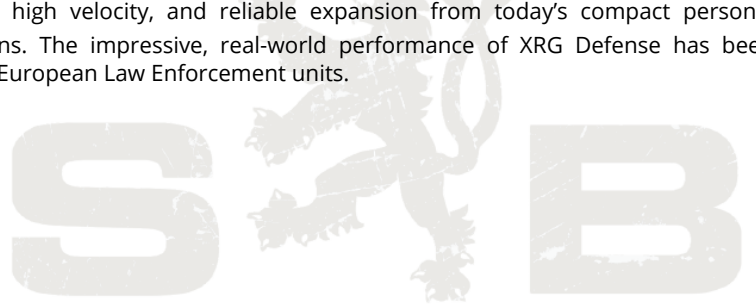

PROPERTIES

| | | | |
|-------------------------------|--------------------|--------------------|-------|
| BULLET | TYPE | XRG-D | |
| | WEIGHT | grs | 130 |
| | | g | 8.40 |
| | SECTIONAL DENSITY | lb/in ² | N/A |
| | MATERIAL OF JACKET | - | |
| | NUMBER | 2365 | |
| BALLISTIC COEFFICIENT | G1 | 0.130 | |
| CARTRIDGE | WEIGHT | g | 13.6 |
| | LENGTH | mm | 28.80 |
| CASINGS | | N/A | |
| POWER FACTOR ESTIMATED | kgr-fps | 162.1 | |
| +P AMMUNITION | | No | |
| TEST BARREL LENGTH | mm | 150 | |
| SUGGESTED USE | | N/A | |
| FEATURES | | N/A | |
| PACKAGING | | | |
| BOXES PER CASE | | 40 | |
| WEIGHT PER CASE | kg | 15.3 | |
| | lb | 33.7 | |

BALLISTICS

| | | | | | |
|-------------------------|-----|--------|-----|------|-------|
| DISTANCE | m | MUZZLE | 25 | 50 | 100 |
| VELOCITY | m/s | 380 | 353 | 331 | 300 |
| ENERGY | J | 606 | 523 | 460 | 378 |
| DISTANCE | m | 12.5 | 25 | 50 | 100 |
| POINTS OF IMPACT | cm | -0.2 | 0.0 | -3.4 | -27.7 |

