


7 × 65 R TXRG V342152 150 GRS



New generation lead free bullets Modern, highly efficient design incorporating a boat-tail base with a new, pointed tip for a flat trajectory and maximum retained energy. Blue plastic tip enhances expansion at all ranges while the solid copper construction maximizes weight retention.

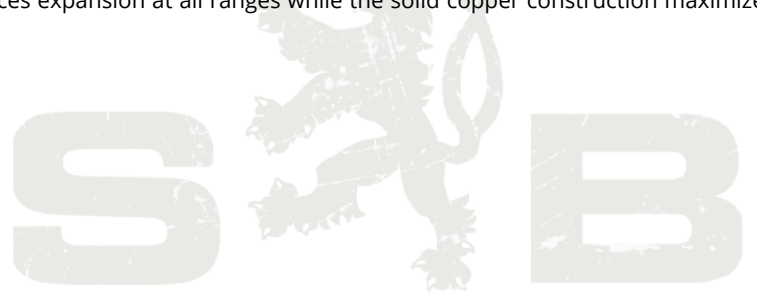

PROPERTIES

| | | | |
|-------------------------------|--------------------|--------------------|-------|
| BULLET | TYPE | | TXRG |
| | WEIGHT | grs | 150 |
| | | g | 9.70 |
| | SECTIONAL DENSITY | lb/in ² | N/A |
| | MATERIAL OF JACKET | | - |
| | NUMBER | | 2969 |
| BALLISTIC COEFFICIENT | | G1 | 0.449 |
| | | G7 | 0.226 |
| MRD | | m | 172 |
| CARTRIDGE | WEIGHT | g | 26 |
| | LENGTH | mm | 83.60 |
| CASINGS | | | N/A |
| POWER FACTOR ESTIMATED | | kgf-fps | 413.0 |
| +P AMMUNITION | | | No |
| TEST BARREL LENGTH | | mm | 680 |
| SUGGESTED USE | | | N/A |
| FEATURES | | | N/A |
| PACKAGING | | | |
| BOXES PER CASE | | | 12 |
| WEIGHT PER CASE | | kg | 8.2 |
| | | lb | 18.1 |

BALLISTICS

| | | | | | | |
|-----------------------------|-----|--------|-------|-------|-------|-------|
| DISTANCE | m | MUZZLE | 100 | 200 | 300 | 400 |
| VELOCITY | m/s | 839 | 772 | 707 | 646 | 588 |
| ENERGY | J | 3,414 | 2,887 | 2,425 | 2,023 | 1,676 |
| DISTANCE | m | 50 | 100 | 200 | 300 | 400 |
| POINTS OF IMPACT | cm | -0.6 | 0.0 | -11.5 | -42.7 | -97.5 |
| POINTS OF IMPACT MRD | cm | 1.3 | 3.8 | -3.9 | -31.4 | -82.4 |

